



1. P.E. CELL OR SHORTING CAP, AS REQUIRED
2. LUMINARIES
AUTOBAHN LED ATB0 71W R2/R3 WITH FIELD ADJUSTABLE OUTPUT
3. ALUMINUM TAPERED ELLIPTICAL ARM
4. EXTRUDED ALUMINUM MOUNTING PLATE
5. POLE FOUNDATION PER THE VILLAGE STANDARD
6. MANHOLE WITH ALUMINUM COVER
LOCATED FACING AWAY FROM CURB.
7. TOP OF FOUNDATION SHALL BE 1-1/2" ABOVE TOP OF CURB OR EDGE OF PAVEMENT UNLESS OTHERWISE APPROVED BY THE VILLAGE ENGINEER.

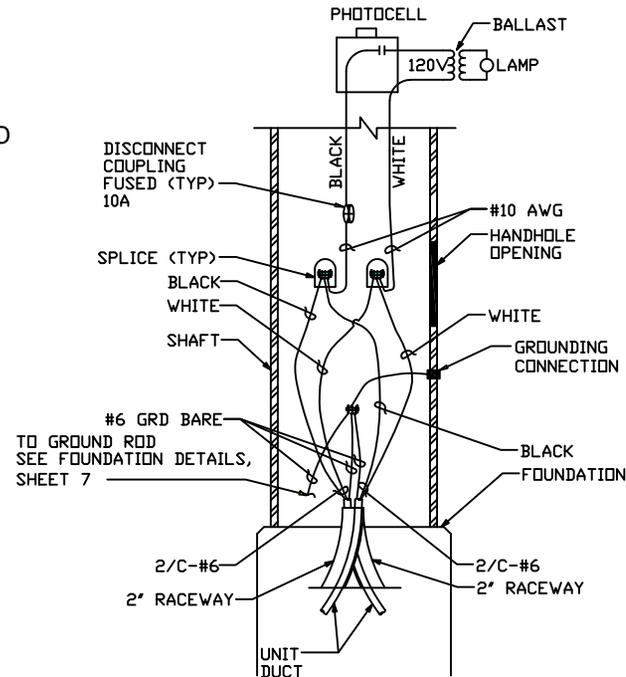

BREAK AWAY POLE BASE DETAIL
NOT TO SCALE

BASE NOTES:

DOOR OPENING OF 5 1/2' x 9 1/4'.

BASE MODEL - AKRON FOUNDRY TB6-9' OR EQUIVALENT

TYPICAL LIGHT POLE BASE WIRING DIAGRAM
NOT TO SCALE



VILLAGE OF WHEELING
ENGINEERING DIVISION
2 COMMUNITY BOULEVARD
WHEELING, IL 60090
WWW.WHEELINGIL.GOV

STREET LIGHT STANDARD

VILLAGE OF WHEELING
SPECIFICATIONS AND DETAILS

FILE LOCATION
T:\ENGINEERING\STANDARDS

REVISIONS

S.W.	11-16-01 AUTOCAD FILE
K.R.G.	9-11-06 AUTOCAD FILE
K.A.G.	12-27-17 LUMINAR TYPE
K.A.G.	10-12-18 BASE/ WIRING

DETAIL NO.

L-1