


RESIDENTIAL BRICK PAVER CROSS SECTION

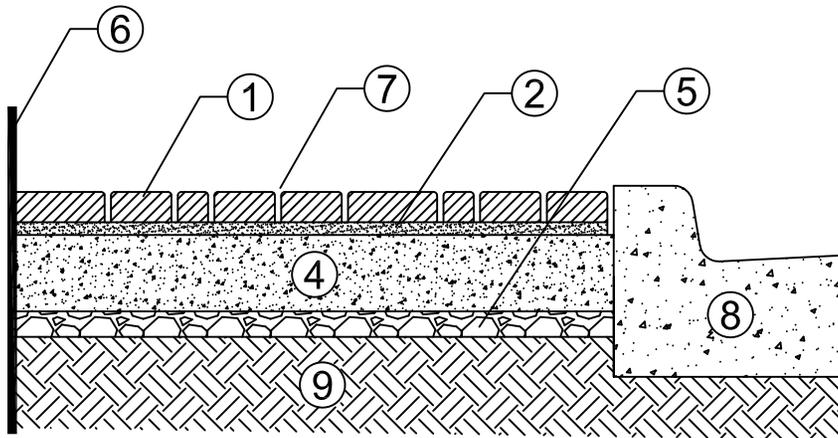

COMMERCIAL BRICK PAVER CROSS SECTION

MATERIALS

- ① UNILOCK OR "APPROVED EQUAL" BRICK PAVER (2-3/8")
 - ② SAND BEDDING (1")
 - ③ COMPACTED GRANULAR BASE *
-8" W/ 2 LIFTS. (DRIVEWAYS)
-6" W/ 2 LIFTS (PATIOS/WALKWAYS)
 - ④ COMPACTED BITUMINOUS COURSE (12") W/ 3 LIFTS
 - ⑤ COMPACTED GRANULAR BASE *
ASTM D 2940 (2")
 - ⑥ VALLEYVIEW T-SHAPE EDGING
W/ MAX. SPIKE DISTANCE 8" - 10"
OR SIDEWALK
 - ⑦ JOINT SAND
 - ⑧ EXISTING CURB & GUTTER
 - ⑨ COMPACTED SUBGRADE
- * COMPACTED GRANULAR BASE SHALL BE VIRGIN CA-6 GRADE 8 OR 9.
NO RECYCLED STONE WILL BE PERMITTED.